





DS-A1-10 Solar Module

www.geokingsolar.com

Dimension	370x270x25(mm); 14.6x10.6x1(inch)
Laminate	Glass/EVA/TPT (tedlar/pet/tedlar) or TPE
Front	High-transmission 3.2mm tempered glass
Back	TPT/TPE
Frame	Clear anodized aluminum frame
Output	Junction box
Weight	1.2kg; 2.64 lbs

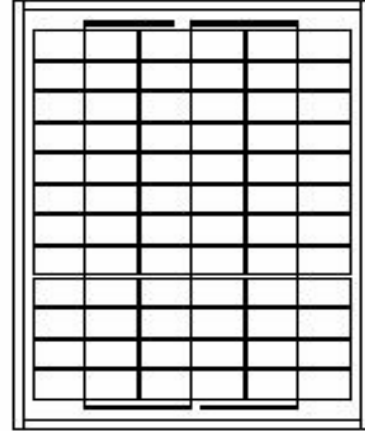

Module	Rated Power (Wp) ±5%	Rated Voltage (Vmp)	Rated Current (Imp)	Open circuit voltage (Voc)	Short Circuit Voltage (Isc)
DS-A1-10	10W	17.3V	0.58A	21.6V	0.64A

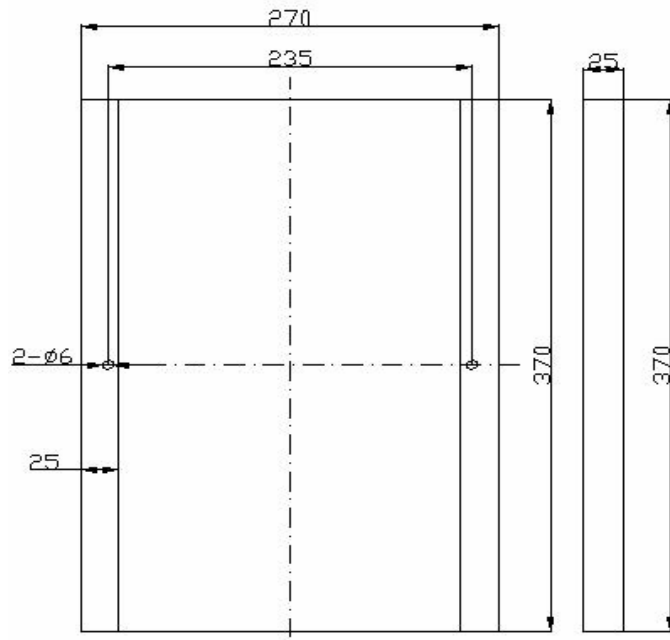

Operation Temperature Range: - 40°C ~ 85°C
 NOCT: 48°C±3°C
 Temperature coefficients of I_m : + 0.1 %/°C
 Temperature coefficients of V_m : - 0.38 %/°C
 Maximum System Voltage: DC715V
 STC: 1000W/m² , 25°C , AM1.5

(Note: Specifications are subject to change without notice)



Q L Enterprises, Inc.

2875 N Berkeley Lake Road NW, Suite 8, Duluth, GA 30096
 Tel.: (678)957-1187 Fax: (678)957-1159 email: sales@geokingsolar.com